


## System pipes

### Geberit Mapress system pipe CrNiMo-steel (small bundle)



#### Application Purpose

- For sanitary, gas and industrial applications

#### Characteristics

- Corrosion-resistant
- Noncombustible, combustible substance class A1 in acc. with DIN 4102-1

#### Product Details

|                              |                                    |
|------------------------------|------------------------------------|
| Product material             | CrNiMo steel 1.4401 (DIN EN 10088) |
| Thermal expansion            | 0.016 mm/(m·K)                     |
| Thermal conductivity of pipe | 15 W/(m·K)                         |
| Surface roughness            | 1.5 µm                             |


#### Scope Of Delivery

- Delivery in sections
- Small bundle

#### Ordering Information

| Article no. | dØ [mm] | DN  | diØ [mm] | s [mm] | L (m) |
|-------------|---------|-----|----------|--------|-------|
| 39202       | 15      | 12  | 13       | 1      | 6     |
| 39203       | 18      | 15  | 16       | 1      | 6     |
| 39204       | 22      | 20  | 19,6     | 1,2    | 6     |
| 39205       | 28      | 25  | 25,6     | 1,2    | 6     |
| 39206       | 35      | 32  | 32       | 1,5    | 6     |
| 39207       | 42      | 40  | 39       | 1,5    | 6     |
| 39208       | 54      | 50  | 51       | 1,5    | 6     |
| 39209       | 76,1    | 65  | 72,1     | 2      | 6     |
| 39210       | 88,9    | 80  | 84,9     | 2      | 6     |
| 39211       | 108     | 100 | 104      | 2      | 6     |

### Geberit Mapress system pipe CrNiMo-steel (large bundle)



#### Application Purpose

- For sanitary, gas and industrial applications

#### Characteristics

- Corrosion-resistant
- Noncombustible, combustible substance class A1 in acc. with DIN 4102-1

#### Product Details

|                              |                                    |
|------------------------------|------------------------------------|
| Product material             | CrNiMo steel 1.4401 (DIN EN 10088) |
| Thermal expansion            | 0.016 mm/(m·K)                     |
| Thermal conductivity of pipe | 15 W/(m·K)                         |
| Surface roughness            | 1.5 µm                             |

#### Scope Of Delivery


- Delivery in sections
- Large bundle

#### Ordering Information

| Article no. | dØ [mm] | DN  | diØ [mm] | s [mm] | L (m) |
|-------------|---------|-----|----------|--------|-------|
| 39002       | 15      | 12  | 13       | 1      | 6     |
| 39003       | 18      | 15  | 16       | 1      | 6     |
| 39004       | 22      | 20  | 19,6     | 1,2    | 6     |
| 39005       | 28      | 25  | 25,6     | 1,2    | 6     |
| 39006       | 35      | 32  | 32       | 1,5    | 6     |
| 39007       | 42      | 40  | 39       | 1,5    | 6     |
| 39008       | 54      | 50  | 51       | 1,5    | 6     |
| 39009       | 76,1    | 65  | 72,1     | 2      | 6     |
| 39010       | 88,9    | 80  | 84,9     | 2      | 6     |
| 39011       | 108     | 100 | 104      | 2      | 6     |

## Bends with plain ends

### Geberit Mapress bend 90° with plain ends

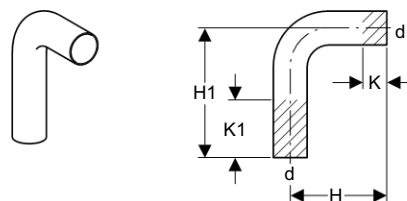

#### Application Purpose

- For sanitary and industrial applications
- For heating installations
- For gas installations with natural gases (NG) and liquefied gases (LPG)

#### Product Details

|                  |                                    |
|------------------|------------------------------------|
| Product material | CrNiMo steel 1.4401 (DIN EN 10088) |
| Elbow            | 90°                                |

#### Ordering Information

| Article no. | dØ [mm] | H [cm] | H1 [cm] | K [cm] | K1 [cm] |
|-------------|---------|--------|---------|--------|---------|
| 30402       | 15      | 7      | 12      | 2,2    | 7,2     |
| 30403       | 18      | 7      | 12      | 1,7    | 6,7     |
| 30404       | 22      | 7      | 12      | 0      | 5       |
| 30405       | 28      | 8      | 12      | 0      | 4       |
| 30406       | 35      | 12     | 20      | 2      | 10      |
| 30407       | 42      | 15     | 25      | 3      | 13      |
| 30408       | 54      | 20     | 30      | 5,5    | 15,5    |
| 30089       | 76,1    | 16,6   | 28,6    | 0      | 12      |
| 30090       | 88,9    | 19,4   | 31,9    | 0      | 12,5    |
| 30091       | 108     | 24     | 37,7    | 0      | 13,7    |