


Expansion fittings

Geberit Mapress axial expansion fitting with pressing sockets

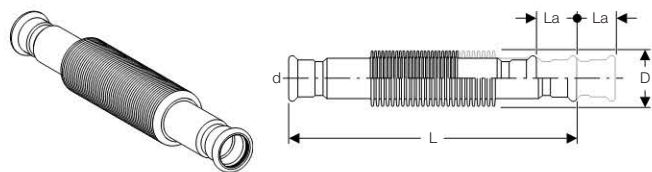

Characteristics

- Leaky if unpressed

Scope Of Delivery


- Seal rings CIIR black

Ordering Information

Article no.	dØ [mm]	D [cm]	La [cm]	L [cm]
33922	15	2,7	0,7	15,1
33923	18	2,7	0,7	14,7
33924	22	3,5	1,1	10,6
33925	28	4,2	1	12
33926	35	4,2	1	13,9
33927	42	5,6	1,1	14,9
33928	54	7,2	1,4	17,6
33929	76,1	9,4	2,2	26,2
33930	88,9	10,5	2,3	28,6
33931	108	13,6	2,3	54,2

Mapress stop valves

Geberit Mapress straight seat stop valve

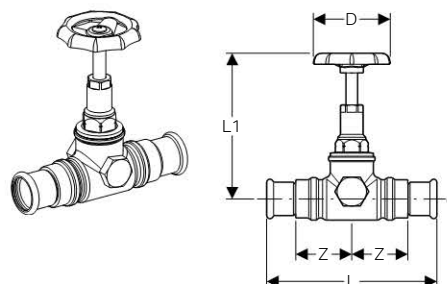

Application Purpose

- For drinking water installations

Characteristics

- No dead space, valve completely scoured out
- Pressing sockets
- Maintenance-free spindle seal with self-lubricating lip seal EPDM
- Valve seal PTFE with stainless steel seat
- Valve body of gunmetal
- Upper part of brass
- Connection for emptying valve, closed

Product Details

Operating temperature	0–90 °C
-----------------------	---------

Scope Of Delivery

- Hand wheel set

Ordering Information

Article no.	dØ [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]	PN [bar]
94862	15	6	13	10,5	4,5	16
94863	18	6	13,2	10,5	4,6	16
94864	22	6	14,2	10,9	5	16
94865	28	7	15,8	13,7	5,6	16
94866	35	7	17,2	16,2	6	16

