


Geberit Mepla adapter with female thread

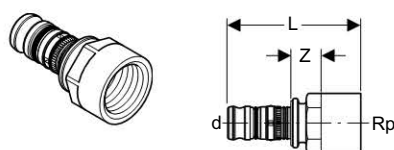

Application Purpose

- For sanitary, heating and industrial purposes

Characteristics

- No oxygen diffusion
- Female thread
- Leaky if unpressed

Product Details

Product material	Brass
------------------	-------


Scope Of Delivery

- O-ring EPDM

Ordering Information

Article no.	dØ [mm]	Rp ["]	L [cm]	Z [cm]
611.554.00.5	16	3/8	5,6	1,9
611.555.00.5	16	1/2	5,6	1,8
612.554.00.5	20	3/8	5,9	1,9
612.555.00.5	20	1/2	5,9	1,8
612.556.00.5	20	3/4	6,1	1,9
613.556.00.5	26	3/4	6,6	1,9
613.557.00.5	26	1	7,1	2,2
614.557.00.5	32	1	6,7	2,2

Geberit Mepla flanged stub with pressing nipple, for Mepla loose flanges PN 6 and PN 10/16

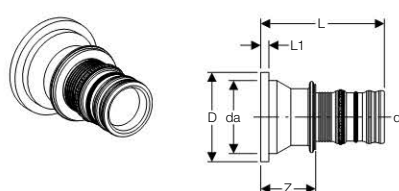

Application Purpose

- For sanitary, heating and industrial purposes


Product Details

Product material	Gunmetal
------------------	----------

Ordering Information

Article no.	dØ [mm]	da [mm]	D [cm]	L [cm]	L1 [cm]	Z [cm]
608.520.00.5	75	95	11,5	15,2	0,6	6,6

Geberit Mepla loose flange PN 10/16

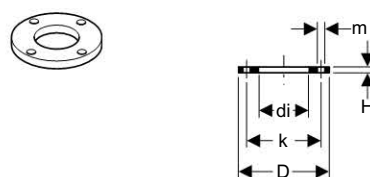

Application Purpose

- For Mepla flange with pressing socket


Product Details

Product material	Brass
------------------	-------

Ordering Information

Article no.	diØ [mm]	H [cm]	k [cm]	m [cm]	D [cm]
63789	97	1,6	14,5	1,8	18,5

Geberit Mepla loose flange PN 6

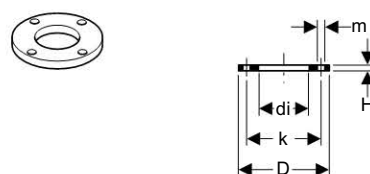

Application Purpose

- For Mepla flange with pressing socket
- Not suitable for Mapress Stainless Steel

Characteristics

- Galvanized

Product Details

Product material	Non-alloy steel 1.0034 E 195 (DIN EN 10305)
------------------	---

Ordering Information

Article no.	diØ [mm]	H [cm]	k [cm]	m [cm]	D [cm]
23799	97	1,6	13	1,4	16

Geberit flange gasket PN 6



Application Purpose

- For Mepla and Mapress flanges
- For gas installations with operating pressure of max. 5 bar

Product Details

Product material	Centellen®-HD 3822
------------------	--------------------

Ordering Information

Article no.	diØ [mm]	Z [cm]	D [cm]
91037	76	0,2	12,7