


## Mepla system pipe, black

### Geberit Mepla system pipe

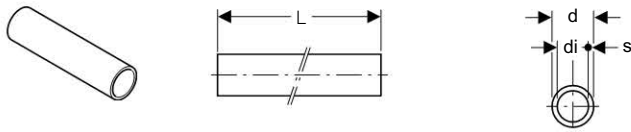

#### Application Purpose

- For sanitary, heating and industrial purposes

#### Characteristics

- Inner pipe, crosslinked
- No oxygen diffusion
- Outside black

#### Product Details

Product material	PE-Xb / Al / PE-HD
Thermal conductivity of pipe	0.43 W/(m·K)
Thermal expansion	0.026 mm/(m·K)
Surface roughness	7 µm
Max. operating temperature sanitary	70 °C
Max. operating temperature heating	80 °C
Storage temperature	-20 – +50 °C


#### Scope Of Delivery

- Delivery in sections

#### Ordering Information

Article no.	dØ [mm]	diØ [mm]	DN	s [mm]	L (m) [m]	Colour Marking
601.100.00.1	16	11,5	12	2,25	5	black
602.100.00.1	20	15	15	2,5	5	black
603.100.00.1	26	20	20	3	5	black
604.100.00.1	32	26	25	3	5	black
605.100.00.1	40	33	32	3,5	5	black
606.100.00.1	50	42	40	4	5	black
607.100.00.1	63	54	50	4,5	5	black
608.100.00.1	75	65,8	65	4,7	5	black

### Geberit Mepla system pipe

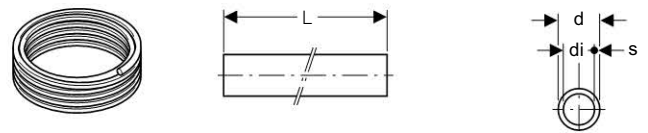

#### Application Purpose

- For sanitary, heating and industrial purposes

#### Characteristics

- Inner pipe, crosslinked
- No oxygen diffusion
- Outside black

#### Product Details

Product material	PE-Xb / Al / PE-HD
Thermal expansion	0.026 mm/(m·K)
Surface roughness	7 µm
Max. operating temperature sanitary	70 °C
Max. operating temperature heating	80 °C
Storage temperature	-20 – +50 °C


#### Scope Of Delivery

- Delivery in rolls

#### Ordering Information

Article no.	dØ [mm]	diØ [mm]	DN	s [mm]	L (m) [m]	Colour Marking
601.130.00.1	16	11,5	12	2,25	50	black
602.130.00.1	20	15	15	2,5	50	black
603.110.00.1	26	20	20	3	50	black

### Geberit Mepla system pipe with protective tube

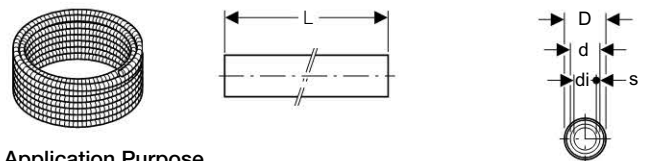

#### Application Purpose

- For sanitary, heating and industrial purposes

#### Characteristics

- Can be bent by hand
- Inner pipe, crosslinked
- No oxygen diffusion
- Outside black

#### Product Details

Product material	PE-Xb / Al / PE-HD
Thermal expansion	0.026 mm/(m·K)
Surface roughness	7 µm
Max. operating temperature sanitary	70 °C
Storage temperature	-20 – +50 °C

#### Scope Of Delivery

- Protective pipe
- Delivery in rolls

#### Ordering Information

Article no.	dØ [mm]	diØ [mm]	D [cm]	DN	s [mm]	L (m) [m]
601.131.00.2	16	11,5	2,7	12	2,25	50
602.131.00.2	20	15	3,1	15	2,5	50