






SABİT KAPLİN / RIGID COUPLING / Style 007RT QUIKHINGE™

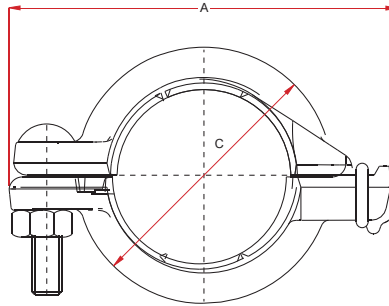

Maximum working pressure: 20 bar

Nominal Size (Inches / DN)	Pipe Outside Dia.	Coupling Dimensions			Bolts				Max. End Load in Newton ‡	Allowed Pipe End Separation mm §	Weight Kg.	Approvals
		A	B	C	No.	Size x Length						
1¼" / 32	42.4	108.0	44.0	65.0	1	M10	x	51.0	2796	0 - 1	0.49	FM / VDS
1½" / 40	48.3	114.0	44.0	71.0	1	M10	x	51.0	3663	0 - 1	0.57	FM / UL / LPCB / VDS
2" / 50	60.3	129.0	45.0	85.0	1	M10	x	51.0	5709	0 - 1	0.70	FM / UL / LPCB / VDS
2½" OD	73.0	142.0	45.0	95.0	1	M10	x	57.0	8367	0 - 1	0.75	FM / UL
2½" / 65	76.1	145.0	45.0	97.0	1	M10	x	57.0	9116	0 - 1	0.72	FM / UL / LPCB / VDS
3" / 80	88.9	165.9	46.5	113.0	1	M10	x	57.0	12408	0 - 1	1.0	FM / UL / LPCB / VDS
4" / 100	114.3	198.3	46.0	147.0	1	M10	x	57.0	20511	0 - 1	1.54	FM / UL / LPCB / VDS
5" / 125	139.7	249.5	52.0	181.0	1	M12	x	76.0	30640	0 - 3	2.95	FM / UL / LPCB / VDS
6" OD	165.1	276.0	52.0	208.0	1	M12	x	76.0	42795	0 - 3	3.50	FM / LPCB
6" / 150	168.3	276.0	52.0	208.0	1	M12	x	76.0	44470	0 - 3	3.15	FM / UL / LPCB / VDS

SABİT KAPLİN / RIGID COUPLING / Style 75RT

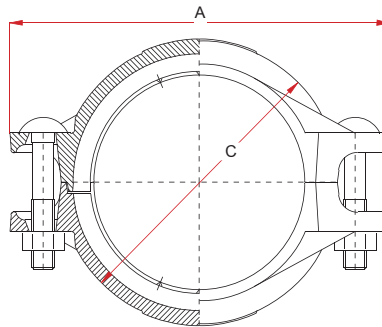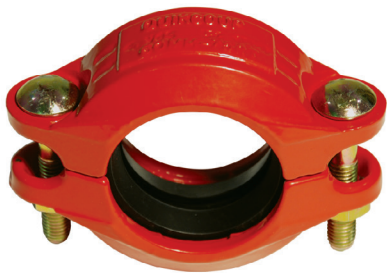

Maximum working pressure: 34.5 bar

Nominal Size (Inches / DN)	Pipe Outside Diameter	Coupling Dimensions			Bolts				Max. End Load in Newton ‡	Allowed Pipe End Separation mm §	Weight Kg.	Approvals
		A	B	C	No.	Size	x	Length				
1¼" / 32	42.4	104.0	46.0	68.5	2	M10	x	57.0	4823	0 – 1	0.64	FM / UL
1½" / 40	48.3	114.0	46.0	78.0	2	M10	x	57.0	6318	0 – 1	0.78	FM / UL / LPCB / VDS
2" / 50	60.3	125.0	46.0	90.0	2	M10	x	57.0	9847	0 – 1	0.82	FM / UL / LPCB / VDS
2½" OD	73.0	142.0	46.0	104.0	2	M10	x	57.0	14432	0 – 1	0.96	FM / UL / LPCB
2½" / 65	76.1	144.0	46.0	106.0	2	M10	x	57.0	15725	0 – 1	1.02	FM / UL / LPCB / VDS
3" / 80	88.9	162.0	46.0	119.0	2	M12	x	76.0	21404	0 – 1	1.27	FM / UL / LPCB / VDS
4" / 100	114.3	198.0	50.0	149.0	2	M12	x	76.0	35382	0 – 1	1.92	FM / UL / LPCB / VDS
5" / 125	139.7	245.0	52.0	180.0	2	M16	x	89.0	52854	0 – 3	3.10	FM / UL / LPCB / VDS
6" OD	165.1	276.0	52.0	207.0	2	M16	x	89.0	73822	0 – 3	3.44	FM / LPCB
6" / 150	168.3	275.0	52.0	207.0	2	M16	x	89.0	76711	0 – 3	3.20	FM / UL / LPCB / VDS
8" / 200	219.1	345.0	60.0	270.0	2	M20	x	120.0	130009	0 – 3	7.18	FM / UL / LPCB / VDS