


STYLE 02

Kep / End-Cap

Maximum working pressure: 34.5 bar

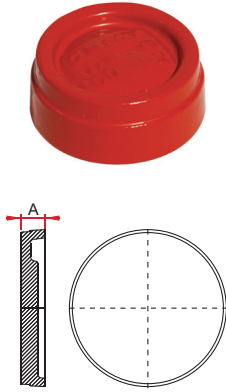


Nominal Size (Inches / DN)	Pipe Outside Diameter	Dimen- sion	Weight Kg.	Approvals
		A		
1¼" / 32	42.4	24.0	0.13	FM / UL LPCB / VDS
1½" / 40	48.3	25.0	0.16	FM / UL
2" / 50	60.3	24.0	0.21	FM / UL LPCB / VDS
2½" / 65	76.1	25.0	0.36	FM / UL LPCB / VDS
3" / 80	88.9	25.0	0.50	FM / UL LPCB / VDS
4" OD	108.0	27.0	0.72	FM / VDS
4" / 100	114.3	28.0	0.76	FM / UL
5" OD	133.0	26.0	1.39	FM / VDS
5" / 125	139.7	27.0	1.38	FM / UL LPCB / VDS
6" OD	159.0	27.0	1.38	FM / UL VDS
6" OD	165.1	27.5	1.57	FM / LPCB VDS
6" / 150	168.3	26.0	1.70	FM / UL LPCB / VDS
8" / 200	219.1	31.0	3.70	FM / UL LPCB / VDS
10" / 250	273.0	34.0	6.47	FM / UL VDS
12" / 300	323.9	34.0	9.20	UL
14" / 350	355.6	38.0	28.90	-
16" / 400	406.4	38.0	37.60	-

STYLE 02D

Delikli Kep / End-Cap with Drain

Maximum working pressure: 34.5 bar

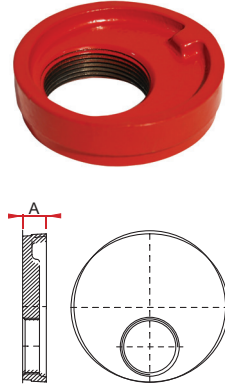

Nominal Size (Inches / DN)	Pipe Outside Diameter	Out- let	Dimen- sion	Weight Kg.	Approvals
			A		
1¼" / 32	42.4	-	-	-	-
1½" / 40	48.3	-	-	-	-
2" / 50	60.3	1"	25.0	0.27	VDS
2½" / 65	76.1	1½" 2"	25.0	0.40	FM / VDS
3" / 80	88.9	1½" 2"	25.0	0.50	FM / UL VDS
4" OD	108.0	1½" 2"	26.0	0.84	FM / UL VDS
4" / 100	114.3	1½" 2"	27.0	0.90	FM / UL
5" OD	133.0	1½" 2"	26.0	1.12	FM / VDS
5" / 125	139.7	1½" 2"	26.0	1.35	FM / VDS
6" OD	159.0	1½" 2"	26.0	1.35	FM / UL VDS
6" OD	165.1	1½" 2"	26.0	1.95	FM / UL
6" / 150	168.3	1½" 2"	26.0	1.94	FM / UL VDS
8" / 200	219.1	1½" 2"	30.0	3.83	FM / UL VDS
10" / 250	273.0	-	-	-	-
12" / 300	323.9	-	-	-	-
14" / 350	355.6	-	-	-	-
16" / 400	406.4	-	-	-	-